




Series 5000

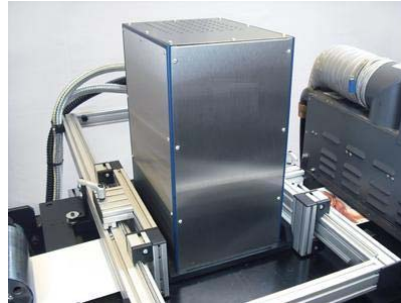

SPECIFICATIONS

Process:	Konica Minolta Piezo Inkjet DOD
Ink Compatibility:	UV Curable, Oil, Solvent
Colors:	Black, Spot Colors, CMYK
Speed:	200 FPM at 360 x 180 DPI 200 FPM at 360 x 360 DPI (interleaved print heads) 100 FPM at 360 x 360 DPI (non-interleaved print heads)
Drop Size:	42 pL, 14 pL, 4 pL
Firing Mode:	Binary (42 pL and 14 pL), Grayscale 4 levels (4 pL)
Firing Frequency:	7.5 kHz
Paper Path:	Continuous Web or Cut-Sheet, Horizontal
Print Width:	1.4" (36 mm) to 11.3" (288 mm), fully stitched (wider upon request)
Registration:	+/- 1/32" (0.8 mm)
Paper Width"	No Restriction
Substrates:	Paper, plastic, film, foil, synthetics
Diagnostics:	Power up self-test, fault monitoring and reporting while running
Environmental:	59 to 82 degrees F, 15 to 28 degrees C
Power:	90 – 250 VAC, 50/60 Hz, 10 Amps
Compressed Air:	Not required



1710 N. Hercules Ave., Suite 107
 Clearwater, Florida 33765
 PH: +1-727-446-3014 FX: +1-727-442-1578
 Web: <http://printingtechnology.net>
 Email: sales@printingtechnology.net

